



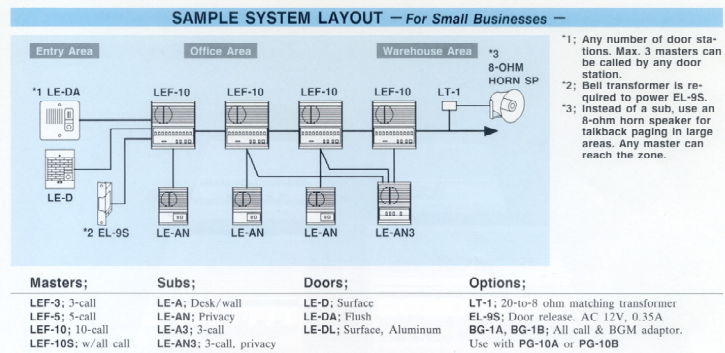

LEF Series Ultimate Convenience in Loudspeaking Communication

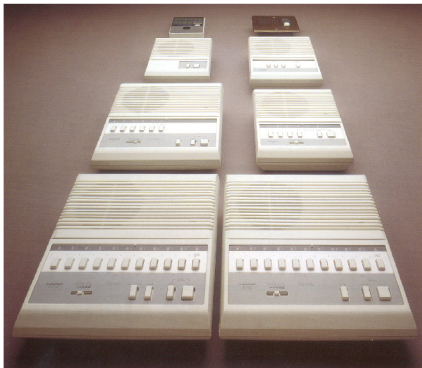

FEATURES

- 3-, 5- and 10-call masters intermixable.
- A variety of subs; weather-resistant, 3-call, and an 8-ohm horn speaker.
- Flexible system layout; Single-master with max. 10 subs, all-master and intermixed system.
- Wall or desk use.
- All call message to other stations from LEF-10S.
- Background music at room stations.
- Door release button at master stations.
- Combines with LEF-C semi-flush units.
- May constitute complete audio/video communication system with MF video components (MFW-P1 or MFW-P3B adaptor required).

SPECIFICATIONS

- | | |
|------------------------------------|--|
| * Power source: | DC 12V. Use PS-12A power supply (PS-12C in N. America) |
| * Current consumption: | Max. 0.3A per station |
| * Power output: | Max. 0.8W at 20 ohm (reception). Max. 0.5W at 20 ohm (transmission) |
| * Calling: | Master to master/sub; Voice and/or call tone
Sub to master; Call tone & LED indicator light (max. 20 seconds) |
| * Wiring: | 5 common + n (No. of masters) (all-master system)
2 individual per sub (single-master system)
2 common + 1 individual per sub (intermixed system) |
| * Distance: | 200m with 0.65mm dia.; 300m with 0.8mm dia.
650' with 22AWG; 1,000' with 20AWG |
| * Dimensions (H × W × D) & weight: | LEF-3; 180 × 143 × 55(mm); 7" × 5-1/2" × 2-1/4"; Approx. 420g (0.93 lbs.)
LEF-5, 10, 10S; 206 × 190 × 55(mm); 8" × 7-1/2" × 2-1/4";
LEF-5; Approx. 550g (1.21 lbs.). LEF-10, 10S; 650g (1.43 lbs.) |